EXTREMEAIR[®] GXT & EXT HAND DRYER SPECIFICATIONS

COMPACT-HIGH SPEED-ENERGY EFFICIENT



Adjustable sound and speed

New patent-pending technology allows the hand dryer to be adjusted to your preference - providing the perfect balance of speed, energy efficiency and sound. It's ideal for sports stadiums, schools or a quiet library.

www.AmeraProducts.com Phone: (800) 608-6568 Fax: (409) 840-5545 info@ameraproducts.com



Universal Voltage

The new **EXTREMEAIR** can be connected to any voltage from 100 to 240 VAC - and 50/60 Hz.

Antimicrobial-infused air delivery system

Better Hygiene - While all of our hand dryers eliminate

paper towel mess, the **EXTREMEAIR** goes one

step further with antimicrobial infused air surfaces.

Distributed by

XTREME A

80-90% LESS ENERGY 3X FASTER 98% COST SAVINGS

EXT SERIES **GXT** SERIES **GREENEST** • NO dedicated line required FASTEST • MAXIMUM performance best selling • energy efficient Connect up to **3 dryers on one** line! 16,000-10,000 LFM Adjustable Air Velocity 16,000-10,000 LFM Adjustable Air Velocity 83 - 69 dB Adjustable Sound 83 - 69 dB Adjustable Sound **135° F** Air Temperature 85° F Air Temperature 12 + seconds 10 + seconds 540 - 300 watts 1500 - 800 watts Adjustable Drying Time Adjustable Drying Time Adjustable Power Adjustable Power EXT MODEL REFERENCE CHART GXT MODEL REFERENCE CHART ABS Steel Black Steel Stainless ABS Steel Black Steel Stainless **Universal Voltage Universal Voltage** White White Graphite White White Graphite Chrome Chrome Steel Steel 100-240 V 50/60 Hz GXT9 GXT9-M GXT9-BG GXT9-C GXT9-SS 100-240 V 50/60 Hz FXT7 FXT7-M FXT7-BG EXT7-C EXT7-SS Recessed Mounting is available by designating (R) after model no. Recessed Mounting is available by designating (R) after model no.

EXTREMEAIR[®] GXT & EXT HAND DRYER SPECIFICATIONS



New Smart Sensor

Ultra energy efficient microprocessor-controlled sensor turns dryer on when hands are under the outlet for up to 35 seconds. Standby power is only one watt. RoHS compliant lead-free design.



New Longer Lasting Motor

New motor lasts up to 25% longer and is quieter. Produces 5/8 HP. Operates between 14,000 to 28,000 RPM. Automatic resetting thermal protector.



Compact

The new **EXTREMEAIR PLUS** is the most compact hand dryer in the industry. It's 43% smaller than old "industry standard" high speed hand dryers.



Vandal Resistant

Two tamper proof screws secure the heavy duty vandal resistant cover to the steel base. Motor and heater are inaccessible to vandals. Air intake is shielded for additional safety.



5 Year

Heating Element


The heating element has an automatic thermal protector and operates in the black range for maximum life.

Heavy Duty One-Piece Cover Options

Flame retardant white ABS Steel with white epoxy finish (M) Steel with black graphite epoxy finish (BG) Steel with satin chrome finish (C) Stainless steel with #4 brush finish (SS)

5 Year Premium Warranty

Includes same-day factory repair or shipment of replacement parts.

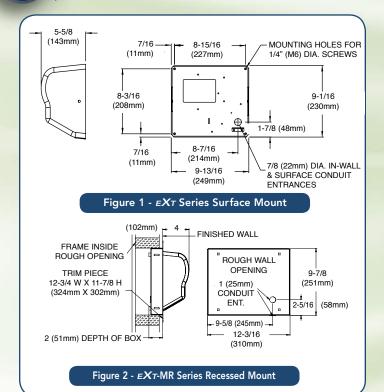

DRYER PLACEMENT - Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor.

ELECTRICAL REQUIREMENTS - *GXτ* dryers connect to a dedicated 15 or 20 amp line. *EXτ* dryers do NOT require a dedicated line. Do not connect more than three *EXτ* hand dryers to one 20 amp line.

MOUNTING - One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both in-wall and surface wiring.

Quantity Estimate:

Average traffic washroom......1 dryer per 2 washbasins Heavy traffic washroom......1 dryer per washbasin 54" wash fountain.......4 dryers per sink

DIMENSIONS: Surface:10-1/8" W x 9-3/8" H x 5-5/8" D

MOUNTING HEIGHTS:	Men	44″
(From floor to bottom	Women	42″
of hand dryer)	Children	32-42″
	Handicapped	36″

SHIPPING WEIGHT:

eXtremeAir 9 lbs, eXtremeAir-M/BG/C/SS 11 lbs

P/N	Accessories
ADA-W	White recess kit for all white models
ADA-SS	Stainless steel recess kit for (BG), (C), (SS) models
AP	Universal adapter plate for all surface models. Stainless.
SG	Stainless steel splash guard for all models. 14"H x 16"W.





Recess Kit Reduces the depth of the dryer to less than 4 inches. Adapter Plate (AP) Stainless steel plate (14" H x 16" W) used to cover holes from older dryers or towel dispensers .

